


## Installation Guide

### Strobes N' More E-Series LED's

401-454-4487 | www.StrobesNMore.com

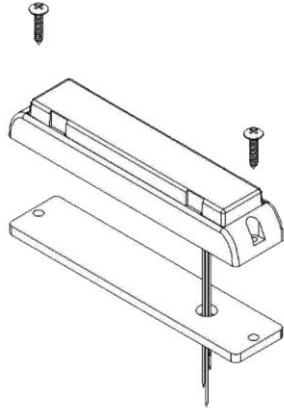

#### FEATURES

Voltage: DC 12/24V

Current **E3**: .35AMPS/MAX, .25AMPS/AVG @ 12.8VDC

Current **E4** and **E6**: Current: .8AMPS/MAX, .5AMPS/AVG @ 12.8VDC

Housing: ABS Material (black)

Cover: PC Material (clear)

Flash Patterns: 12, includes OFF

Heat Sink: Extruded Aluminum

Switching Function: Previous/Next/Simultaneous

Waterproof Design

**RED** - Activation Wire +12 Volts

**BLACK** - Ground Wire -12 Volts

**BLUE** - Flash Pattern Selection

**YELLOW** - Synchronize Wire

**WHITE** - Hi/Low Power Wire

\*E6 Brake Model: **WHITE** - Brake Override

Connect **YELLOW** wires of all heads together for sync.

Connect two **YELLOW** wire groups together:

Group 1: Phase 1 & Phase 1 or Phase 2 & Phase 2 will flash together

Group 2: Phase 1 & Phase 1 or Phase 2 & Phase 2 will flash alternative

#### FLASH PATTERN SELECTION

Apply +12 Volts to **BLUE** wire to change patterns:

1 Sec for Next Pattern

1~3 Secs for Previous Pattern

3~5 Secs for Steady Burn

5+ Secs light will turn off

Reapply +12 Volts to **BLUE** wire and light will reappear

#### E3 FLASH PATTERNS

P1: Burst Flash

P2: Burst Flash Alternating

P3: Quad Flash

P4: Quad Flash Alternating

P5: Double Flash

P6: Double Flash Alternating

P7: Single Flash

P8: Single Flash Alternating

P9: Mixed Flash

P10: Mixed Flash Alternating

P11: Steady

P12: OFF

#### E4 and E6 FLASH PATTERNS

P1: Alternating Quad Burst

P2: Simultaneous Quad Burst

P3: Simultaneous Quad Burst

P4: Quad Alternating

P5: Quad Simultaneous

P6: Quad Simultaneous

P7: Single Alternating

P8: Single Simultaneous

P9: Single Simultaneous

P10: Single Alternating Rapid

P11: Single Simultaneous Rapid

P12: Single Simultaneous Rapid

P13: Alt Quad Single Rapid & Quad Burst

P14: Alternating Quad Single Rapid and Quad Burst

P15: Alternating Rapid Pulse w/ Variable Rate

P16: Simultaneous Rapid Pulse w/ Variable Rate

P17: Quad Burst & Quad Single Rapid & Quad Burst

P18: Steady w/ 5 Single & Single POP

P19: Steady 5 Single

P20: Steady

P21: Cycle Flash

P22: OFF

**WARRANTY** Provided this product is installed and operated in a manner consistent with its use, Strobes N' More guarantees the E-Series of lights for a period of 5 years from the day of purchase. Units demonstrated to be defective within the warranty period will be repaired or replaced at the seller's discretion. The end user is responsible for shipping / returning the item to Strobes N' More and we will cover the cost of return shipping. International customers are responsible for all shipping charges. Improper installation or use of inappropriate or inadequate wiring or circuit protection causes the warranty to be void. Applying voltage directly to the LED's will cause immediate failure and void the warranty. Damages resulting from improper use and/or accidents are not covered by this warranty. Aluminum will corrode if left in the elements or area of high road salt use. Proper cleaning of the light is essential to keeping the unit in like new condition. Magnets are used to hold the light in place Use of non-compatible components and assemblies may cause damage to the system and/or personal injury, and voids all warranties. Strobes N' More LLC shall in no way be liable for other damages including consequential, indirect or special damages whether loss is due to negligence or breach of warranty. Visit [www.StrobesNMore.com/warranty](http://www.StrobesNMore.com/warranty) for more information.