

## Installation Guide

### Strobes N' More LP Array License Plate Bracket



**Safety First!** Before beginning the installation and/or operation of your LEDs, the installation technician and operator must read this manual in full, *before* installation. This document provides all the necessary information to allow your light to be properly and safely installed to prevent severe injury or damage.

Proper installation of this product requires the installer to have a good understanding of automotive electronics, systems and procedures. Do not stare directly into these lights. Momentary blindness and/or eye damage could result. Do not install this product or route any wires in the deployment area of your air bag. Equipment mounted or located in the air bag deployment area will damage or reduce the effectiveness of the air bag or become a projectile that could cause serious personal injury or death. Refer to your vehicle owner manual for the air bag deployment area. The User/Installer assumes full responsibility to determine proper mounting location, based on providing ultimate safety to all passengers inside the vehicle. If this product uses a remote device to activate or control this product, make sure that this control is in an area that allows both the vehicle and the control to be operated safely in any driving condition. Do not attempt to activate or control this device in a hazardous driving situation.

If mounting this product requires drilling holes, the installer must be sure that no vehicle components or other vital parts could be damaged by the drilling process. Check both sides of the mounting surface before drilling begins. Also, de-burr any holes and remove any metal shards or remnants. Install grommets into all wire passage holes. For this product to operate at optimum efficiency, a good electrical connection to chassis ground must be made. The recommended procedure requires the product ground wire to be connected directly to the NEGATIVE (-) battery post or vehicle chassis. Do not attach the NEGATIVE (-) wire to any other existing ground wire. It is recommended that these instructions be stored in a safe place and referred to when performing Maintenance and/or reinstallation of this product. **FAILURE TO FOLLOW INSTRUCTIONS COULD RESULT IN DAMAGE TO THE PRODUCT OR VEHICLE AND/OR SEVERE INJURY TO YOU AND YOUR PASSENGERS!**

#### Wiring

Black	-12 Volts – Ground
Red	+12 Volts – Activation Color 1
Blue	+12 Volts – Activation Color 2
Red & Blue	+12 Volts – Combination of Color 1 & 2
White	+12 Volts – Alternating Patterns
Yellow	+12 Volts – Momentary - Flash Pattern Selection

**White Alternating Pattern Wire** - Leaving the White wire disconnected all 4 modules will flash together on the desired flash pattern. If you wish the flash pattern to alternate 2 modules against 2 modules apply +12 Volts to the White Wire.

#### SPECIFICATIONS

Input Voltage: 10 – 30VDC

Max Power: 36 Watts

Fuse: 5 Amps

Dimensions: 12.5" W x 6.6" H x 1.5" D


**Red and Blue Activation Wire** - These will determine the mode

**Mode 1** Red Wire only will activate Primary Color

**Mode 2** Blue Wire only will activate Secondary Color

**Mode 3** Red & Blue wire together will activate both colors

**Yellow Flash Pattern Wire** - Flash Patterns can be changed by applying Momentary +12 volts to the Yellow Wire.

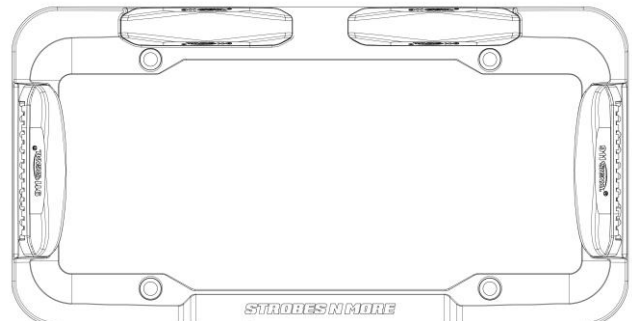

**WARRANTY** Provided this product is installed and operated in a manner consistent with its use, Strobes N' More guarantees its LP Array license plate bracket for a period of 2 years from the day of purchase. Units demonstrated to be defective within the warranty period will be repaired or replaced at the seller's discretion. The end user is responsible for shipping/returning the item to Strobes N' More and we will cover the cost of return shipping. For our complete Warranty Policy Visit, [www.StrobesNMore.com/warranty](http://www.StrobesNMore.com/warranty) for more information.