

Installation Guide


Strobes N' More E66 and E66MINI



Safety First! Before beginning the installation and/or operation of your LED's, the installation technician and operator must read this manual in full, *before* installation to prevent severe injury or damage. NEVER apply any voltage to the LED directly. Failure to power the LEDs with the supplied factory installed flasher automatically voids the warranty.

Proper installation of this product requires the installer to have a good understanding of automotive electronics, systems and procedures. Do not stare directly into these lights. Momentary blindness and/or eye damage could result. Do not install this product or route any wires in the deployment area of your air bag. Equipment mounted or located in the air bag deployment area will damage or reduce the effectiveness of the air bag, or become a projectile that could cause serious personal injury or death. Refer to your vehicle owner manual for the air bag deployment area. The User/Installer assumes full responsibility to determine proper mounting location, based on providing ultimate safety to all passengers inside the vehicle. If this product uses a remote device to activate or control this product, make sure that this control is in an area that allows both the vehicle and the control to be operated safely in any driving condition. Do not attempt to activate or control this device in a hazardous driving situation.

If mounting this product requires drilling holes, the installer must be sure that no vehicle components or other vital parts could be damaged by the drilling process. Check both sides of the mounting surface before drilling begins. Also, de-burr any holes and remove any metal shards or remnants. Install grommets into all wire passage holes. For this product to operate at optimum efficiency, a good electrical connection to chassis ground must be made. The recommended procedure requires the product ground wire to be connected directly to the NEGATIVE (-) battery post or vehicle chassis. Do not attach the NEGATIVE (-) wire to any other existing ground wire. It is recommended that instructions be stored in a safe place and referred to when performing Maintenance and/or reinstallation of this product. FAILURE TO FOLLOW THESE SAFETY INSTRUCTIONS COULD RESULT IN DAMAGE TO THE PRODUCT OR VEHICLE AND/OR SEVERE INJURY TO YOU AND YOUR PASSENGERS!

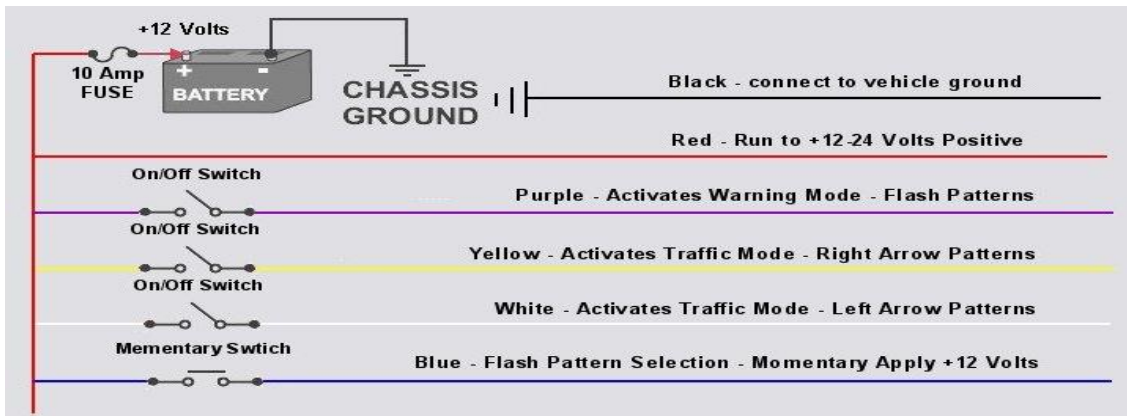

Flash Pattern Selection: Select Flash Patterns by applying BLUE wire to + Positive 12 Volts

1 second short touch then release for Forward Pattern; repeat until the desired pattern is selected.

1~3 seconds for reverse Flash Pattern Selection; repeat until desired pattern is selected

3~5 seconds touch then release RESET

Flash Patterns can be set individually to each mode:

Warning Mode Applying +12 volts to the **Purple** wire activates Warning Mode. While warning mode is activated you can use Blue wire to select desired flash pattern.

Right Traffic Arrow Mode Applying +12 volts to the **Yellow** wire activates Right Arrow Mode. While right arrow mode is activated you can use Blue wire to select desired Right Arrow Flash Pattern

Left Traffic Arrow Mode Applying +12 volts to the **White** wire activates Left Arrow Mode. While left arrow mode is activated you can use Blue wire to select desired Left Arrow Flash Pattern.

Center Out Arrow Mode Applying +12 volts to both the **Yellow and White** wires activate the Center Out Mode. While center out arrow mode is activated you can use Blue wire to select desired Center Out Arrow Flash Pattern.

WARRANTY Provided this product is installed and operated in a manner consistent with its use, Strobes N' More guarantees the E Series lights for a period of 5 years from the day of purchase. Units demonstrated to be defective within the warranty period will be repaired or replaced at the seller's discretion. The end user is responsible for shipping / returning the item to Strobes N' More and we will cover the cost of return shipping. International customers are responsible for all shipping charges. Improper installation or use of inappropriate or inadequate wiring or circuit protection causes the warranty to be void. Applying voltage directly to the LED's will cause immediate failure and void the warranty. Damages resulting from improper use and/or accidents are not covered by this warranty. Aluminum will corrode if left in the elements or area of high road salt use. Proper cleaning of the light is essential to keeping the unit in like new condition. Magnets are used to hold the light in place Use of non-compatible components and assemblies may cause damage to the system and/or personal injury, and voids all warranties. Strobes N' More LLC shall in no way be liable for other damages including consequential, indirect or special damages whether loss is due to negligence or breach of warranty. Visit www.StrobesNMore.com/warranty for more information.